



- NOTES:
- MATERIAL:
 BODY: S475. PLASTIC, BLACK, UL 94V-0
 TERMINAL: C5210-SH, T=0.12mm
 PUSHER: SUS304-3/4H T=0.50mm
 EJECT LEVER: SUS304-3/4H T=0.40mm
 SHELL: SUS304-3/4H T=0.15mm
 - FINISH:
 TERMINA: 50u" Ni MIN UNDER PLATING OVER ALL
 1U" AU ON CONTACT AREA
 SHELL / SWITCH: 30u" Ni MIN UNDER PLATING OVER ALL
 1U" AU ON SOLDERTAIL AREA
 - CONTACT RESISTANCE 50 mΩ MAX
 INSULATION RESISTANCE 1000mΩ MIN
 HIGH VOLTAGE RESISTANCE 500V AC, 1 MINUTE
 OPERATING VOLTAGE 10V DC
 PEAK CURRENT 0.5A MAX
 OPERATING TEMPERATURE -20°C/+85°C
 STORAGE TEMPERATURE -20°C/+85°C
 SALT SPRAY: 48H
 - MECHANICAL LIFETIME MIN. 3000 MATING CYCLE
 - ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC
 - GP PASSED ACCORD WITH HRD-RoHS-219 STANDARD.
 - ALL DIMENSIONS MARKER (XX) MUST BE MEASURE BY FAI.


局部视图 B
比例 8 : 1

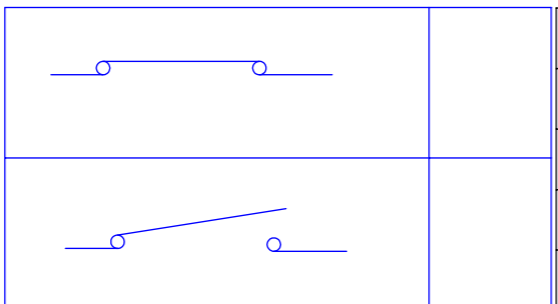

REV.	ECN NO.	DESCRIPTION	DATE	UNITS: mm	GENERAL TOLERANCE	DRAW:	PART NO:
B	E1710368A	结构优化	10/24/2017	DATE: 11/17/2016	X. ±0.25 .X ±0.15 .XX ±0.10 .XXX ±0.05	X.° ±5.00° .X° ±3.00° .XX° ±1.00° .XXX° ±0.50°	S168-1B03F13F
A		NEW	11/17/2016	SCALE: 4 / 1		CHECKED:	TITLE: SIM CARD 卡座上1.35H SHELL件
				SHEET: 1 / 4		APPROVE:	DRAWING NO:
				REV. A	MATERIAL:		
					FINISH: SEE NOTE		

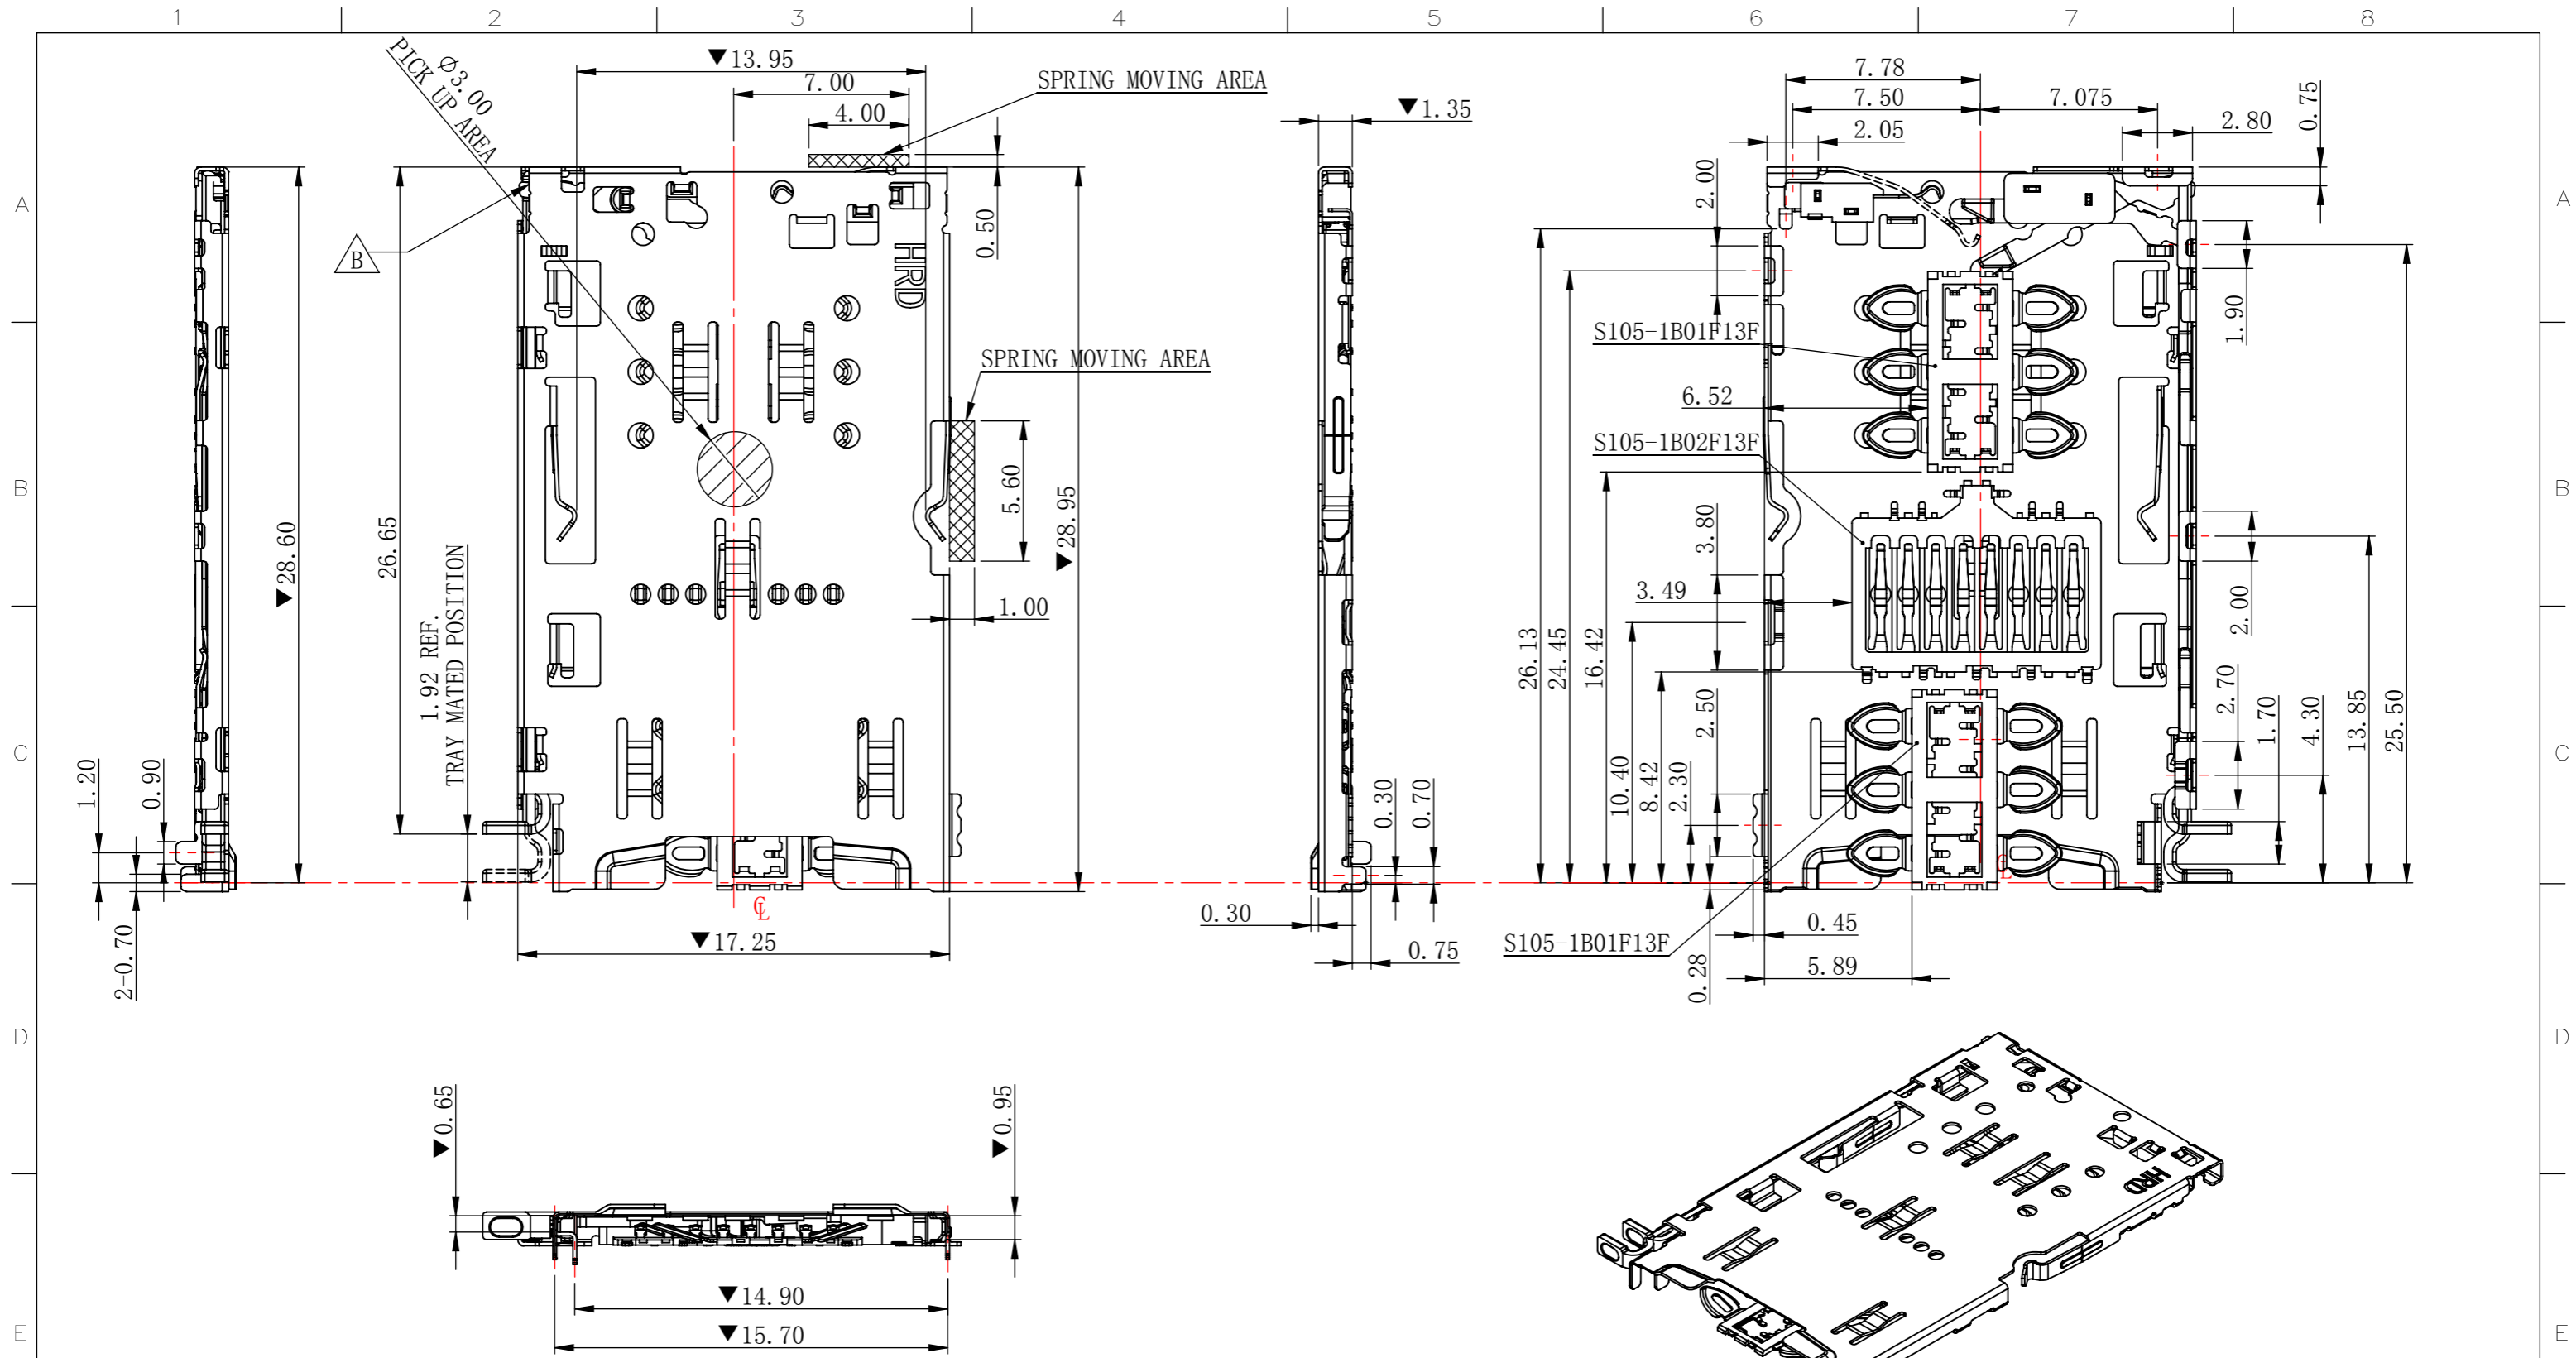


SIM CARD PIN NO.	PIN NO.	T-CARD PIN NO.	PIN NO.
P1 P2	VCC	C1	DAT2
P3	RST	C2	CD/DAT3
P4 P5	CLK	C3	CMD
/	RESERVED	C4	VDD
P6 P7	I/O	C5	CLK
P8	VPP	C6	VSS
P9 P10	GND	C7	DAT0
/	RESERVED	C8	DAT1
s/w	SWITCH PIN		

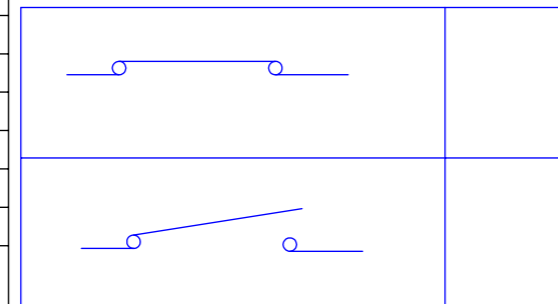




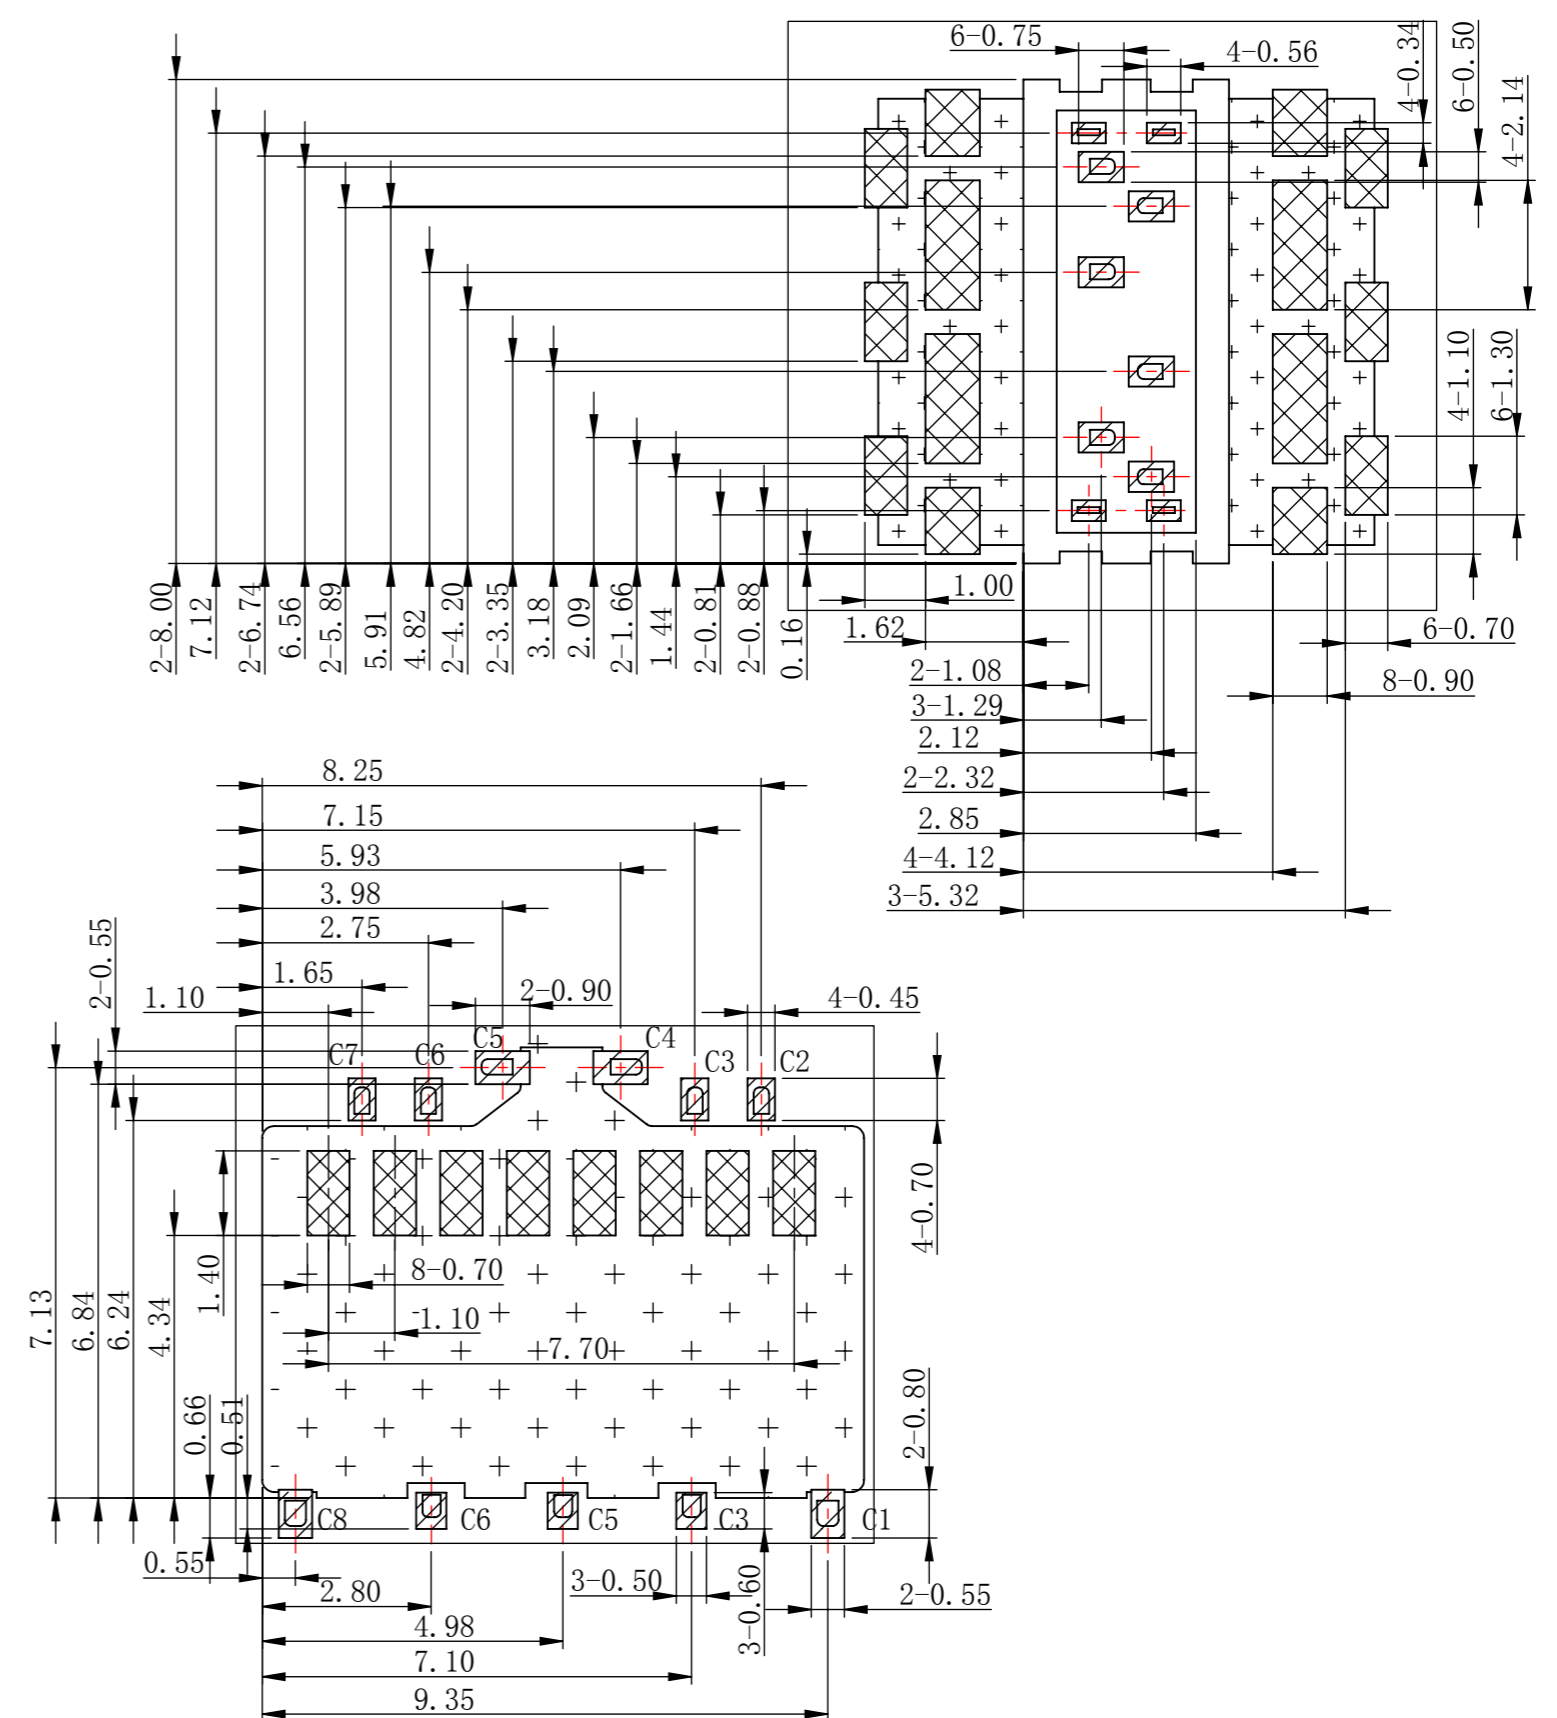
REV.	ECN NO.	DESCRIPTION	DATE	UNITS: mm	GENERAL TOLERANCE	DRAW:	PART NO:
B	E1710368A	结构优化	10/24/2017	DATE: 11/17/2016	X. ±0.25 .X ±0.15 .XX ±0.10 .XXX ±0.05	X.° ±5.00° .X° ±3.00° .XX° ±1.00° .XXX° ±0.50°	S168-1B03F13F
A		NEW	11/17/2016	SCALE: 4/1	MATERIAL:	CHECKED:	TITLE: SIM CARD 卡座板上1.35H SHELL件
				SHEET: 2/4	FINISH: SEE NOTE	APPROVE:	DRAWING NO:

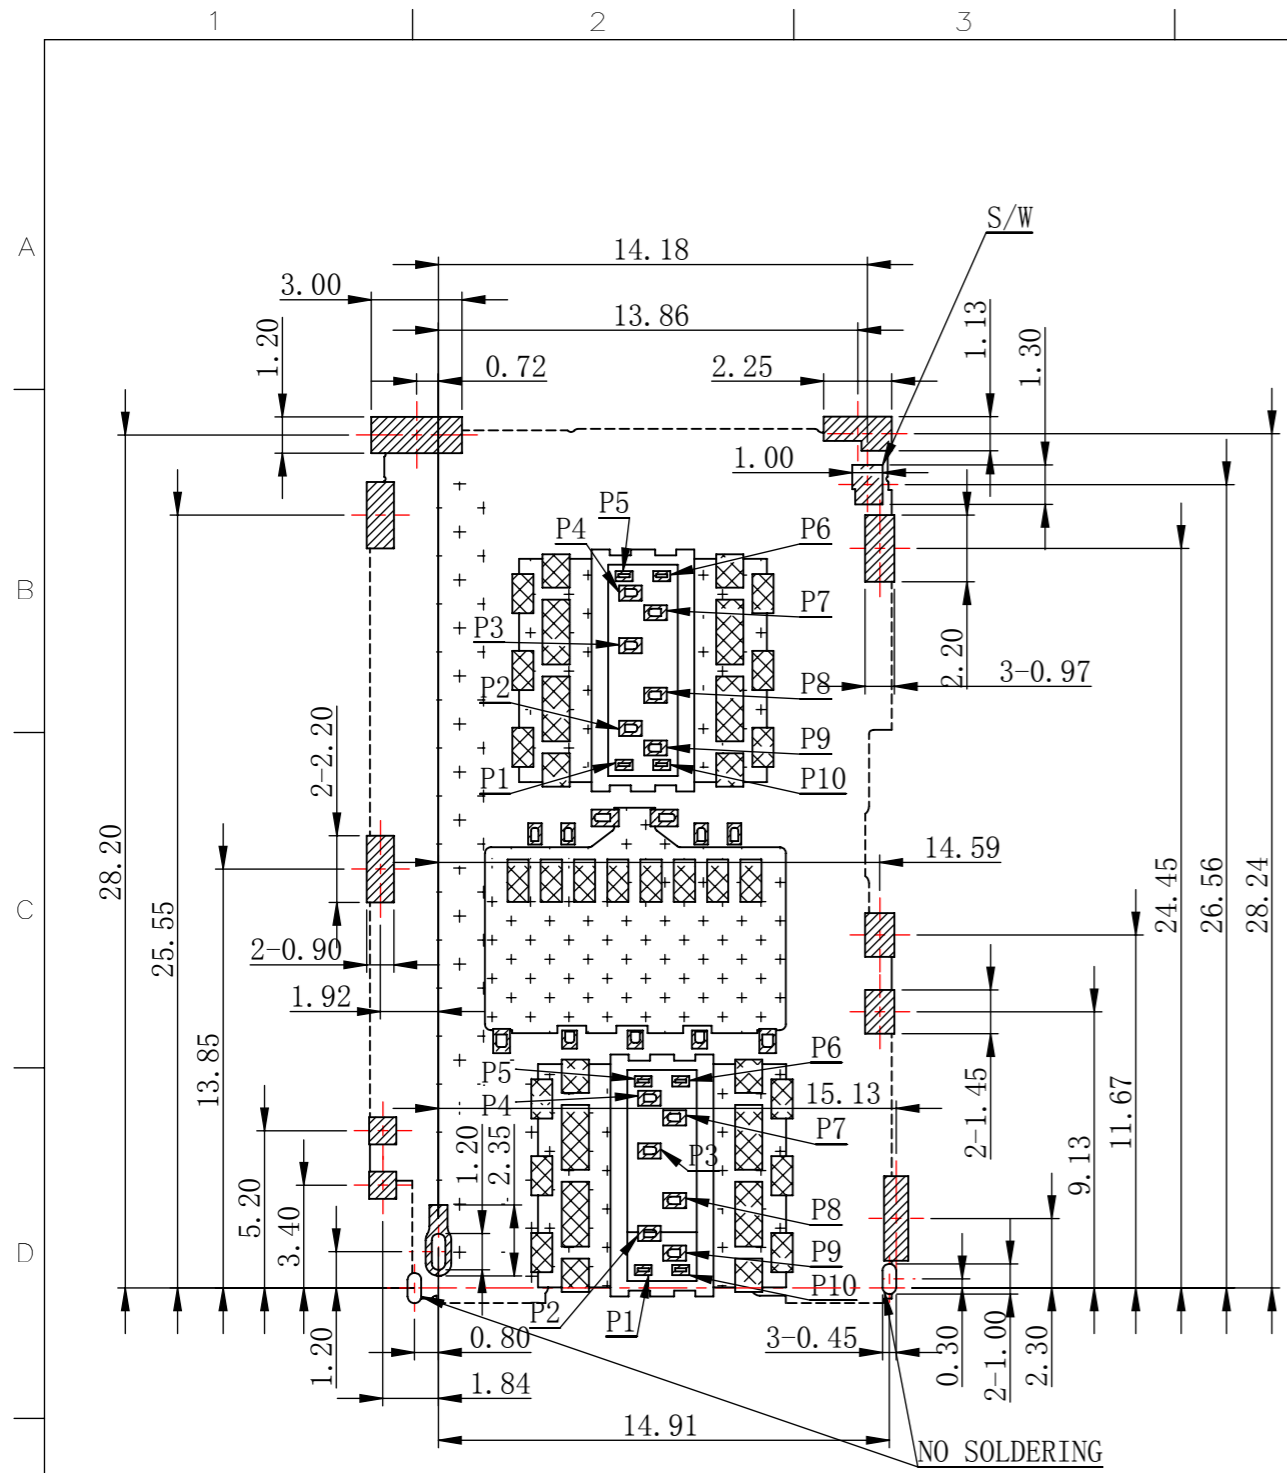

昆山捷皇电子精密科技有限公司
 HONGRIDA ELECTRONIC TECHNOLOGY CO.,LTD.



RECOMMENDED P. C. B LAYOUT
TOLERANCE: ± 0.05

-  Soldering Pad Area
-  Open Wire Restricted Area
-  Open Wire & Copper Restricted Area
 1. Touch Area Of Contact Tips, No Electrical Function And Only For Mechanical Function
 2. No First PCB-layer Circuits In The Area



				UNITS: mm	GENERAL TOLERANCE		DRAW:	PART NO:
				DATE: 11/17/2016	X. ± 0.25	X° $\pm 5.00^\circ$	CHECKED:	TITLE: SIM CARD 卡座板上1.35H 组合使用方式
B	E1710368A	结构优化	10/24/2017	SCALE: 4/1	.XX ± 0.10	.XX° $\pm 1.00^\circ$	APPROVE:	DRAWING NO:
A		NEW	11/17/2016	SHEET: 3/4	MATERIAL:		 昆山捷皇电子精密科技有限公司 HONGRIDA ELECTRONIC TECHNOLOGY CO., LTD.	
REV.	ECN NO.	DESCRIPTION	DATE	REV. A	FINISH: SEE NOTE	